EASY green™

BY RONSTAN

WIRE TRELLIS SYSTEM

Add a striking aesthetic to your home or building

Beautify unsightly walls, fences and courtyards with an elegant wire trellis.

Add value to your property investment.

Enjoy the benefits of a greener environment.

- Flexible system to suit multiple trellis layouts and designs
- Simple and easy to install - DIY installation
- Suitable for climbing plants

See **www.ronstan.com/EasyGreen** for more information

RONSTAN

TENSILE ARCHITECTURE

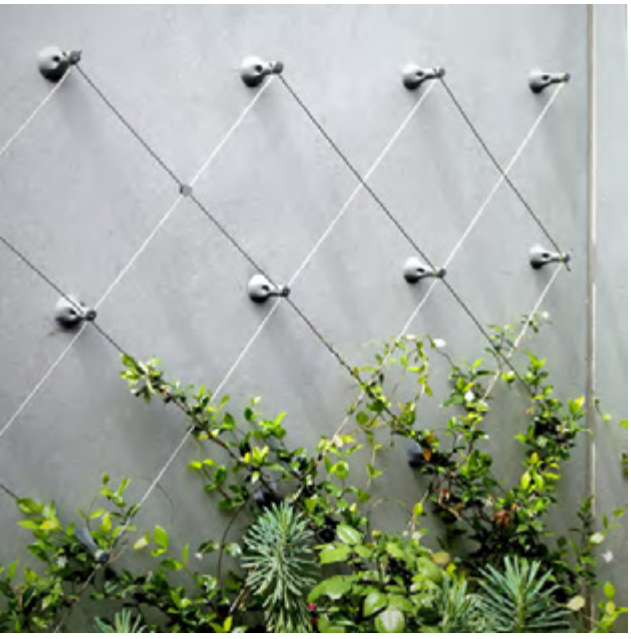

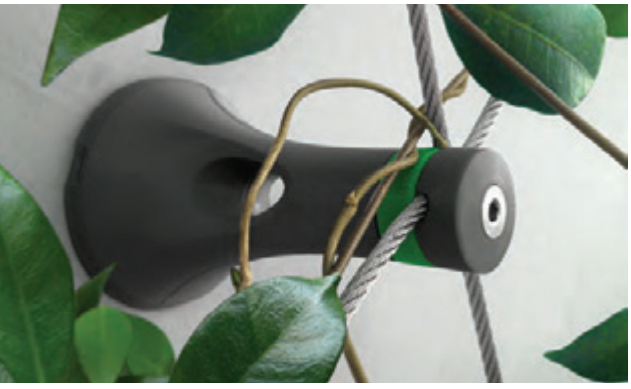

EASY green™

TYPICAL LAYOUT OPTIONS

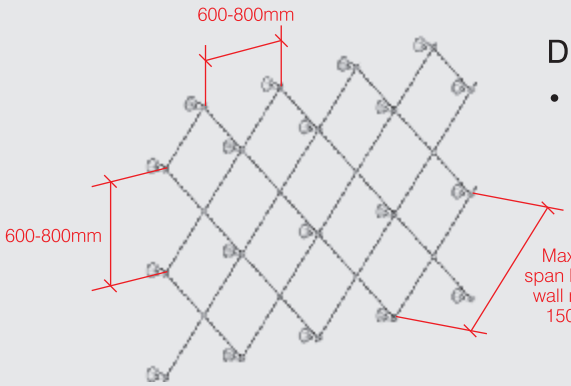

DIAGONAL

- For vines and climbers

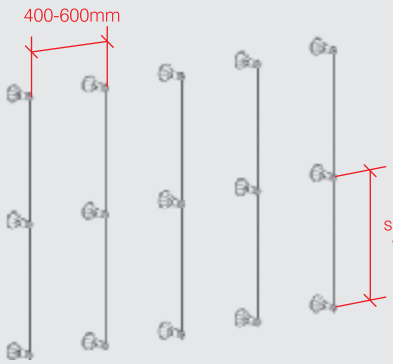

VERTICAL

- For vines and climbers

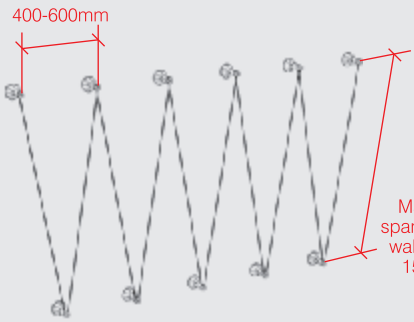

INCLINED

- For vines and climbers
- For espalier fruit trees

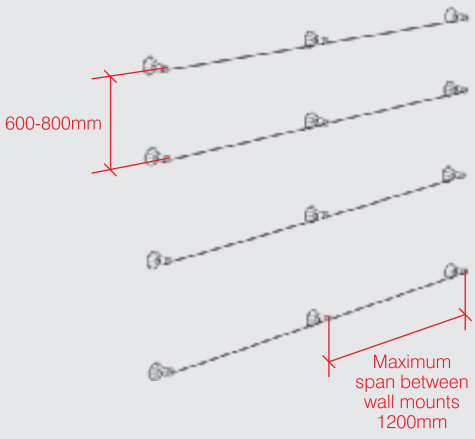

HORIZONTAL

- For espalier fruit trees
- For scrambling plants such as scrambling Roses and Bougainvillea

INSTALLATION INSTRUCTIONS - Masonry walls

CONTENTS

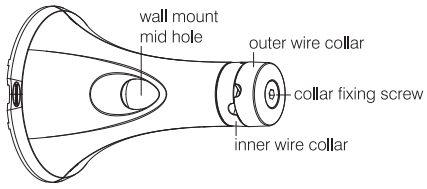

EASY GREEN WALL MOUNT



DUAL THREAD SCREW

WALL PLUG

TOOLS/EQUIPMENT REQUIRED

POWER HAMMER DRILL

MASONARY DRILL BIT
10mm (3/8")

SPANNER (SIZE 6)

HEX KEY(4mm)

1

Drill (dia)10mm (3/8") hole perpendicular to surface.

Minimum hole depth 65mm (2.5").

Ensure hole is clean.



2

Lightly tap wall plug into the hole until flush.

Ensure the head of the wall plug is flush with the wall surface.



3

Screw dual-thread screw into the wall plug slowly in a clockwise direction.

Ensure screw is straight and screw until all the (tapered) screw is covered.

Ensure the M8 thread is exposed from the wall, 25mm minimum, 30mm maximum.



4

Screw EasyGreen wall mount onto the M8 section of the dual-thread screw in a clockwise direction until the base of the wall mount is hard up against the wall.

Hand tight only!

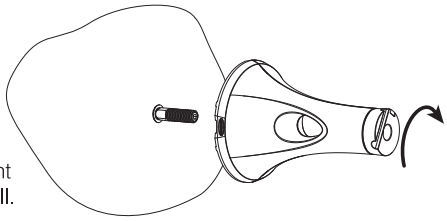

5

Continue to rotate the mount until the mid hole of the EasyGreen wall mount is in a horizontal direction.

Ensure the the EasyGreen wall mount is flush & tight against the wall surface.

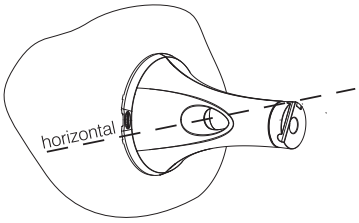

6

Rotate the inner collar to the required orientation required for the first 4mm (5/32") wire.

Place the wire/cable into the groove.

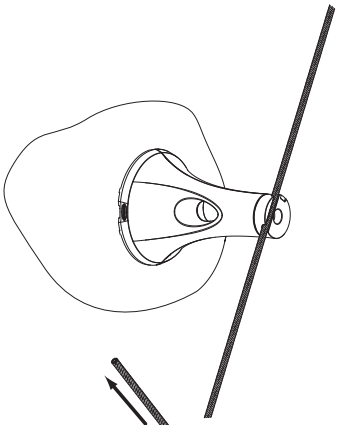

7

Place the second 4mm (5/32") wire into the groove of the wall mount outer collar and fit to the wall mount with the fixing screw.

Screw until the clearance between the inner & outer collars is closed up.

Do not tighten at this stage.

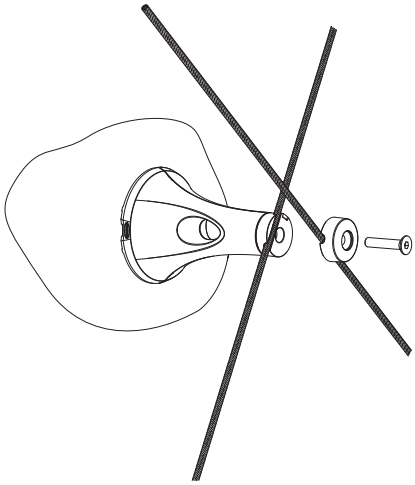

8

Pull wires/cables firmly through collars and tighten collar screw.

For mounts or subsequent rows pull the wires through the collars firmly in the direction away from the first row of mounts and then tighten the collar screw firmly.

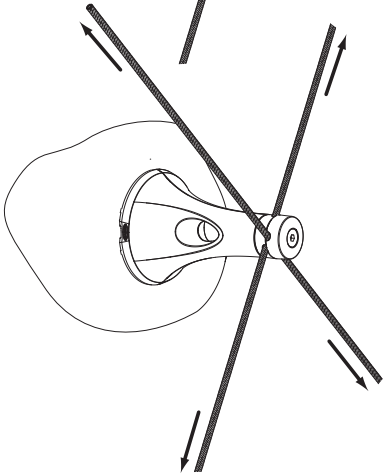

EASY green™ BY RONSTAN

The Easy Green™ wire trellis system provides essential structure for climbing plants and is design to encourage plant coverage up walls, fences and courtyards.

Easy Green™ is a simple and practical way to beautify or hide boundary walls and fences behind green climbing plants.

Wall mounts utilise an innovative, fully adjustable, swivelling head to clamp 4mm stainless steel cable in varying trellis layouts and patterns without the need for turnbuckles.

The high strength UV resistant composite construction of Easy Green™ matches the performance of stainless alternatives at a fraction of the cost, is simple to install, and fully recyclable.

www.ronstantensilearch.com

Cable Trellis Systems catalogue

The Cable Trellis Systems catalogue is packed full of inspirational green walls, arbour ideas and technical advice, including beautiful and simple vertical landscapes that don't cost the earth.

The systems provide essential structure for vertical climbing plants. When combined with correct plant selection and used in the right aspect and site orientation, they can be applied as modules to suit any wall or facade. The range of cable systems detailed aims to deliver simple cable systems that provide the necessary structure for vertical climbing plants.

covet

Vertical garden information at Covet

Vertical gardens, outdoor lighting, designer landscape products - sign up online for updates.

e: info@wecovet.com.au
p: (03) 9398 8128
w: wecovet.com.au